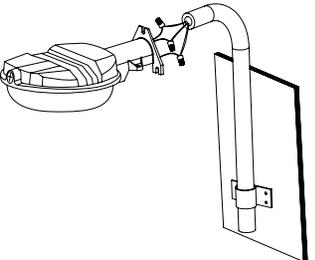
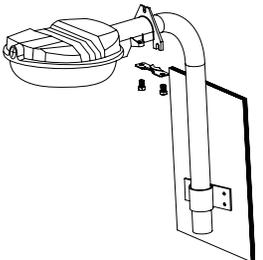
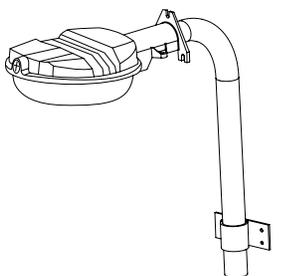
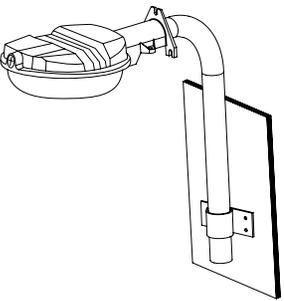


INSTRUCTIONS

58W LED OUTDOOR SECURITY LIGHT - MOUNTING ARM INCLUDED

<p style="text-align: center;">Step 2</p>  <p>Connect the wire in same colors (corresponds to wire N, L and G) together with a wire connector.</p>	<p style="text-align: center;">Step 3</p>  <p>Put one end of the tube into the U-slot, and then fix the tube with two hex socket screws. Please make sure that the tube will not rotate.</p>
<p style="text-align: center;">Step 4</p>  <p>Fixed in a right position and make sure that the pipe will not rotate.</p>	<p style="text-align: center;">Step 5</p>  <p>Install the light fixture on the wall with four screws.</p>

After installation, please

- check whether the photocell is firmly fixed (skip it if not equip the sensor).
- check whether the lighting fixture is firmly fixed.
- check whether wires are connected correctly.

	LUX	PHOTOCELL	FIXTURE
DUSK	< 60 LUX 60-120 LUX	ACTIVATES NO ACTION	ON ON
DAWN	> 120 LUX 120-60 LUX	ACTIVATES NO ACTION	OFF OFF



1. INTRODUCTION

- This LED outdoor security light uses the latest in solid state lighting technology for long life, low maintenance, and high efficiency.
- Same as the traditional HID lighting, a standard photocell could be mounted on the top (ANSI C136.10), to make it completely suitable for street lighting.
- An internal power-factor-corrected switch-mode supply allows it to be used from any nominal 100V-277V, 60Hz AC supply without any variation in light output.
- Suitable for use in the following locations:
 1. Ambient Temp: -20c° ~ +50c°
 2. Wet Locations IP65

Note : Save these instructions for future reference.

For item 4-80035

2. INSTALLATION

Warning:

To avoid the risk of fire, explosion, or electric shock, this product should be installed, inspected, and maintained by a qualified electrician only, in accordance with all applicable electrical codes.

Warning:

To avoid electric shock:

- Be certain electrical power is OFF before and during installation and maintenance.
- Fixture must be connected to a wiring system with an equipment grounding conductor.

Warning:

To avoid an explosion:



- Make sure the supply voltage is the same as the rated luminaire voltage.
- Do not install where the marked operating temperatures exceed the ignition temperature of the hazardous atmosphere.
- Do not operate in ambient temperatures above those indicated on the Fixture nameplate.
- Keep lens tightly closed when in operation.

For supply connections use wire rated for at least 100°C


INSTALLATION STEPS :

Refer to the following diagram when you install the fixture. Two installation methods, directly fix to the mounting surface or fix to the mounting surface with an arm.

1. Directly fix to mounting surface



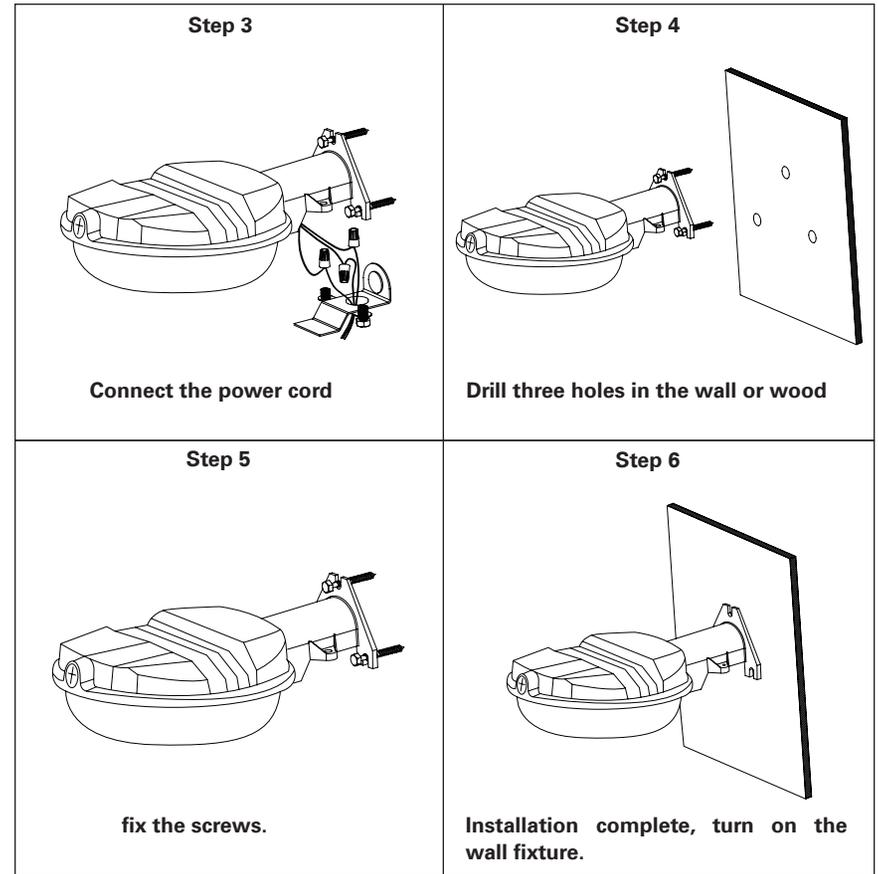
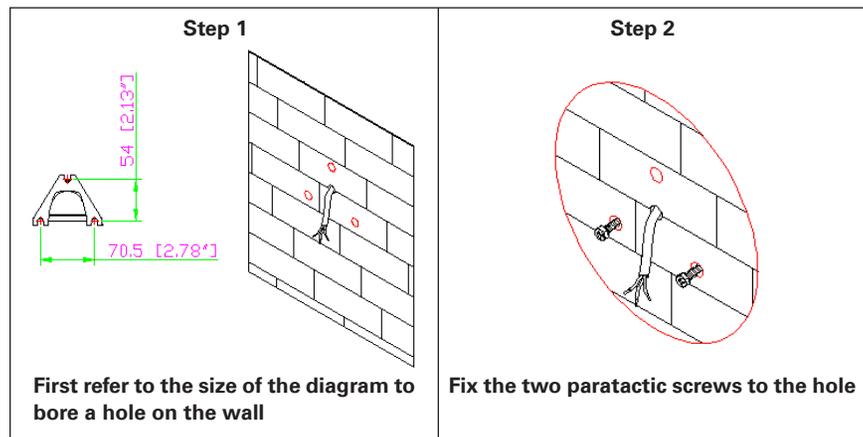


2. Fix to mounting surface with an arm

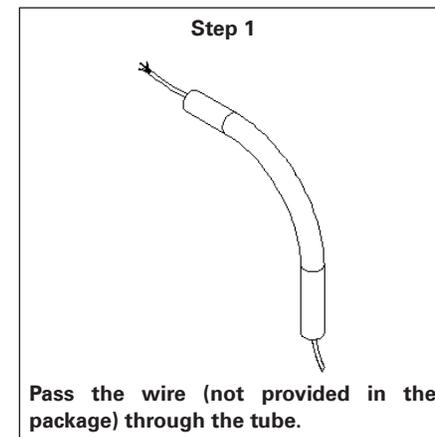

INSTRUCTIONS

58W PROJECTEUR EXTÉRIEUR DEL - BRAS DE MONTAGE INCLUS
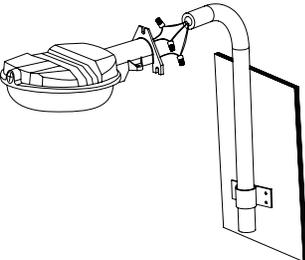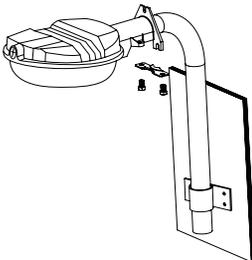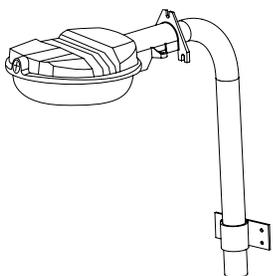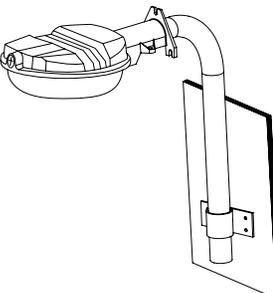
<p>Étape 2</p>  <p>Connecter le fil dans les mêmes couleurs (correspond aux fils N, L et G) avec un connecteur de fils.</p>	<p>Étape 3</p>  <p>Mettez une extrémité du tube dans le logement U et le fixer le tube avec deux vis à six pans creux. S'il vous plaît s'assurer que le tube ne tourne pas.</p>
<p>Étape 4</p>  <p>Fixez dans une position droite et assurez-vous que le tuyau ne tourne pas.</p>	<p>Étape 5</p>  <p>Installer la fixture sur le mur avec quatre vis.</p>

Après l'installation:

- Vérifier si la cellule est solidement fixé
- Vérifier si l'appareil d'éclairage est solidement fixé
- Vérifier si les fils sont correctement connectés

	LUX	PHOTOÉLECTRIQUE	FIXTURE
CRÉPUSCULE	< 60 LUX 60-120 LUX	ACTIVER PAS D'ACTION	ON ON
L' AUBE	> 120 LUX 120-60 LUX	ACTIVER PAS D'ACTION	OFF OFF



1. INTRODUCTION

- Ce luminaire LED utilise la dernière technologie d'éclairage pour une longue vie, peu d'entretien et une grande efficacité.
- De même que l'éclairage traditionnel HID, une cellule photoélectrique standard pourrait être monté sur le dessus pour rendre le luminaire complètement adapté à l'éclairage de la rue.
- Un facteur de puissance corrigé à l'alimentation interne lui permet d'être utilisé de n'importe quel appareil de 100V-277V, 60Hz d'alimentation sans aucune variation de la production de lumière.
- Approprié pour une utilisation dans les endroits suivants:
 1. Température ambiante: -20c° ~ +50c°
 2. Endroits humides IP65

Note : Conserver ces instructions pour référence future.

Pour item 4-80035

2. INSTALLATION

Avertissement:

Pour éviter les risques d'incendie, d'explosion ou de choc électrique, ce produit doit être installé, inspecté et entretenu par un électricien qualifié seulement, conformément à tous les codes électriques applicables.

Avertissement:

Afin d'éviter un choc électrique:

- L'alimentation électrique doit être éteinte avant et pendant l'installation et l'entretien.
- Le luminaire doit être connecté à un système de câblage avec un conducteur de mise à la terre.

Avertissement:

Pour éviter une explosion:



- Assurez-vous que la tension d'alimentation est la même que la tension du luminaire classé.
- Ne pas installer là où les températures de fonctionnement indiquées excèdent la température d'inflammation de l'atmosphère explosive.
- Ne pas faire fonctionner dans des températures ambiantes supérieures à celles indiquées sur la plaque signalétique du luminaire.
- Maintenir l'objectif bien fermé lorsqu'il est en fonctionnement.

Pour les connexions d'alimentation d'utiliser du fil classé pour au moins 100 c°.

ÉTAPES D'INSTALLATION:

Reportez-vous au schéma suivant lorsque vous installez l'appareil. Il existe deux méthode d'installation: directement fixer à la surface de montage ou fixer à la surface de montage avec bras.

1. Directement fixer à la surface de montage

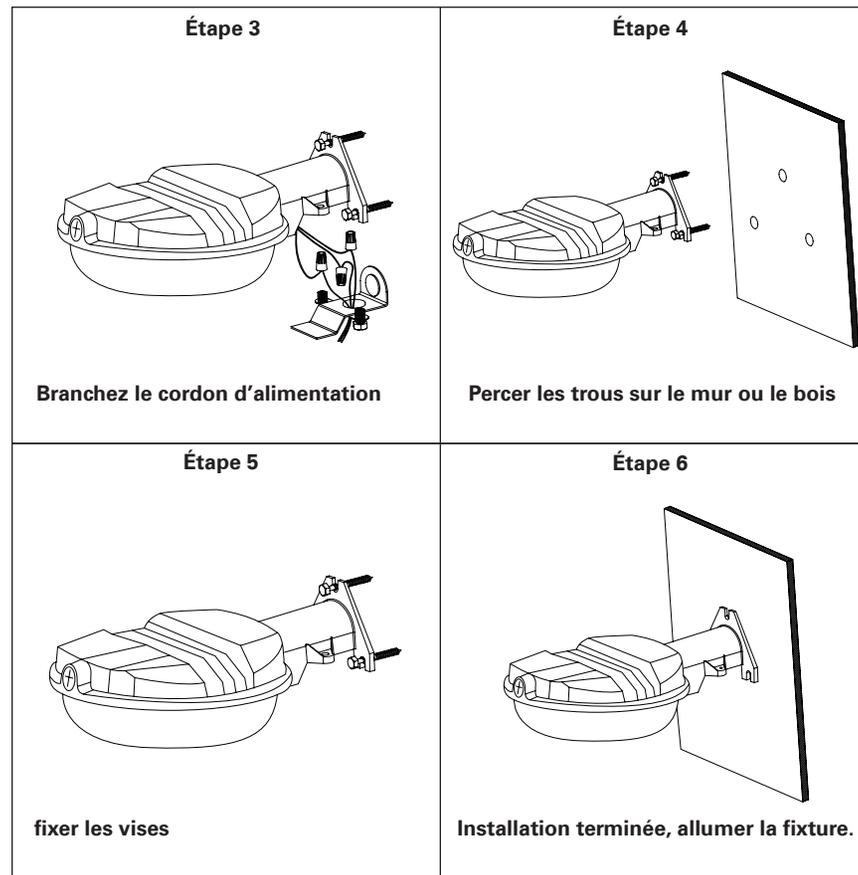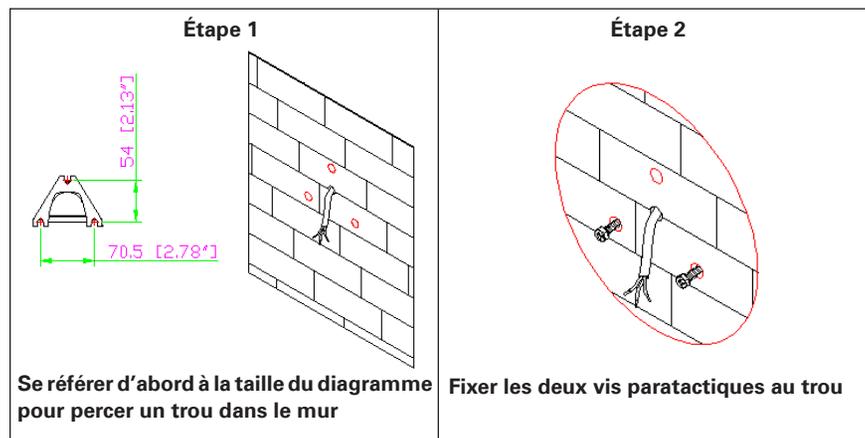

2. Fixer à la surface de montage avec bras

