

LED FLAT PANEL CEILING FIXTURE - SPEC SHEET PLAFONNIER À PANNEAU PLAT DEL - FICHE TECHNIQUE

Item No. 1-50052


TECHNICAL SPECIFICATIONS / SPÉCIFICATIONS TECHNIQUES

- Sizes: 7.5" dia. x 1.375" H
- 120 Volts / LED 12 Watts
- 800 Lumens
- Degrees Kelvin: 4000K
- Color: White
- Dimmable
- Beam angle: 120°
- CRI > 80
- SDCM < 7
- Apporoved for wet locations
- Operating temperature: from -25° to +45°
- Warranty: 1 year
- Dimensions: 7.5" dia. x 1.375" H
- 120 Volts / DEL 12 Watts
- 800 Lumens
- Degrés Kelvin : 4000K
- Couleur: Blanc
- Graduelle
- Angle du faisceau : 120°
- CRI > 80
- SDCM < 7
- Approuvé pour les endroits humides
- Température de fonctionnement: de -25° à +45°
- Garantie: 1 an


CERTIFICATION:



DIMENSIONS / DIMENSIONS

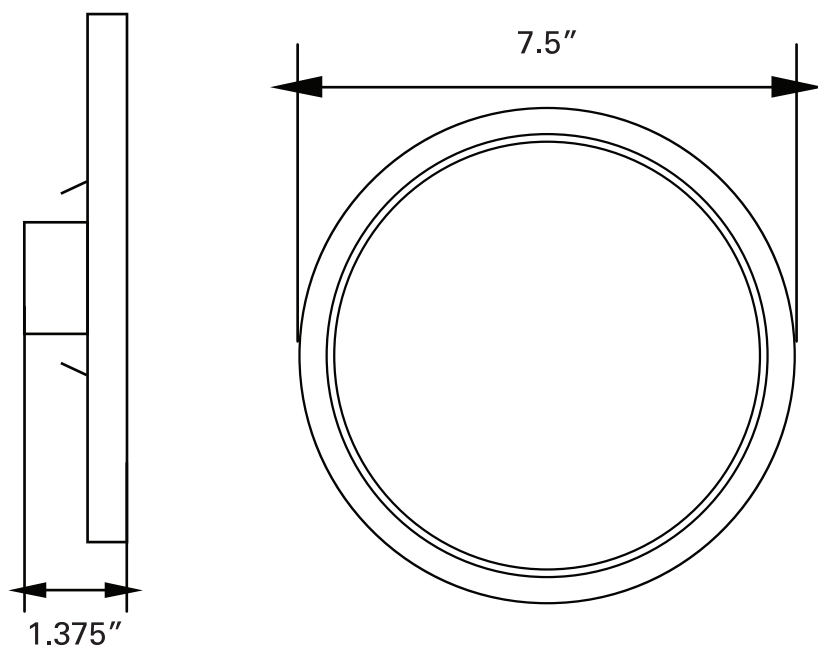

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM / COURBE DE RÉPARTITION D'INTENSITÉ LUMINEUSE

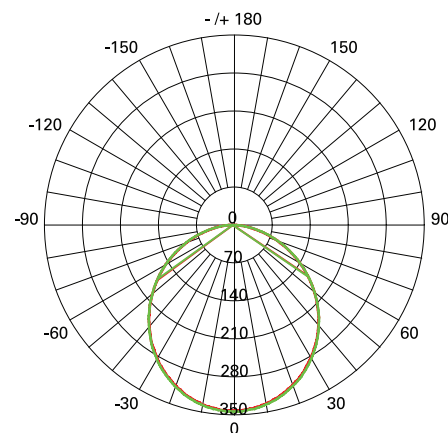

AVERAGE BEAM ANGLE (50%): 111.7°
ANGLE MOYEN DU FAISCEAU (50%): 111.7°
Unit: CD
— CO/180,111.8°
— C90/270,111.7°

FLUX / LUX

Flux out: 693.6 1m

Height	E avh	E max	Angle: 111.48 deg	Diameter
1m	100.4	336.7 Lx		293.65 cm
2m	25.11	84.17 Lx		587.30 cm
3m	11.16	37.41 Lx		880.95 cm
4m	6.277	21.04 Lx		1174.60 cm
5m	4.018	13.47 Lx		1468.25 cm
6m	2.790	9.352 Lx		1761.90 cm
7m	2.050	6.871 Lx		2055.55 cm
8m	1.569	5.260 Lx		2349.20 cm
9m	1.240	4.156 Lx		2642.85 cm
10m	1.004	3.367 Lx		2936.50 cm

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Note : Les courbes indiquent la zone éclairée et la moyenne d'éclairage lorsque le luminaire est à différentes distances.