


SPEC SHEET FICHE TECHNIQUE

Item No. 4-80185


TECHNICAL SPECIFICATIONS / SPÉCIFICATIONS TECHNIQUES

- Sizes: 3.54" dia. x 0.93" H
 - 120 Volts / LED 8 Watts
 - 600 Lumens
 - Degrees Kelvin: 2700 / 3000K / 4000K / 5000K / 6500K, choose with the selection button.
 - Beam angle: 180°
 - 3.04" hole to be drilled
 - IC and Airtight
 - Apporoved for wet locations
 - Operating temperature: from -25° to +45°
- Dimensions: 3.54" dia. x 0.93" H
 - 120 Volts / DEL 8 Watts
 - 600 Lumens
 - Degrés Kelvin : 2700 / 3000K / 4000K / 5000K / 6500K, choix à l'aide du bouton de sélection
 - Angle du faisceau : 180°
 - Trou à percer 3.04"
 - IC et Airtight
 - Approuvé pour les endroits humides
 - Température de fonctionnement: de -25° à +45°

DIMENSIONS / DIMENSIONS

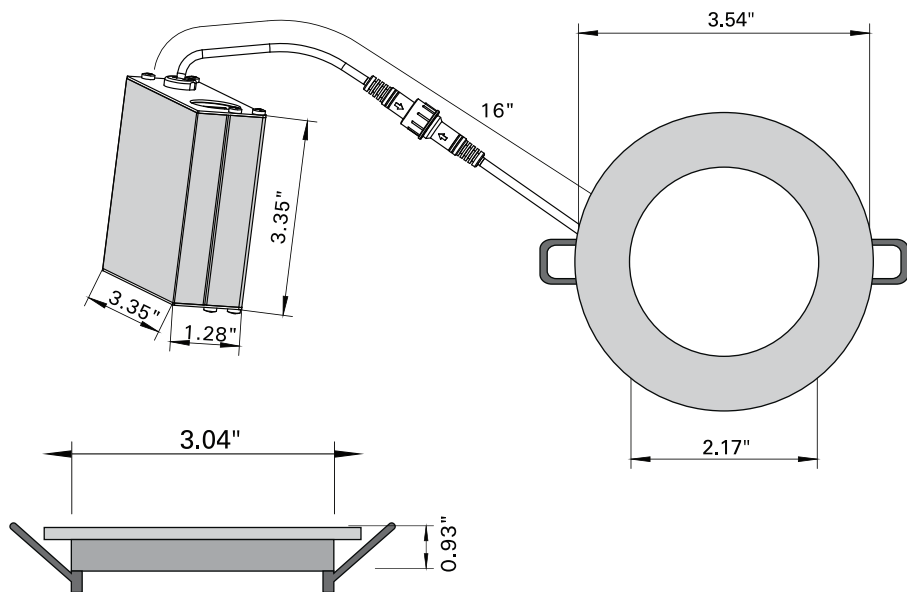

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM / COURBE DE RÉPARTITION D'INTENSITÉ LUMINEUSE

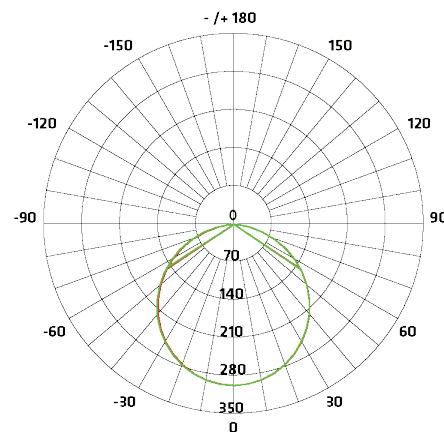

AVERAGE BEAM ANGLE (50%): 107.7°
ANGLE MOYEN DU FAISCEAU (50%): 107.7°
Unit: CD — CO/180,107.8°
 — ZCO/180,107.8°

FLUX / LUX

Flux out: 587.8 lm

Height	E avh	E max	Angle: 107.47 deg	Diameter
1m	98.76	307.3 Lx		272.63 cm
2m	24.69	76.84 Lx		545.26 cm
3m	10.97	34.15 Lx		817.89 cm
4m	6.172	19.21 Lx		1090.52 cm
5m	3.950	12.29 Lx		1363.15 cm
6m	2.743	8.537 Lx		1635.78 cm
7m	2.015	6.272 Lx		1908.41 cm
8m	1.543	4.802 Lx		2181.04 cm
9m	1.219	3.794 Lx		2453.67 cm
10m	0.9876	3.073 Lx		2726.30 cm

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Note : Les courbes indiquent la zone éclairée et la moyenne d'éclairage lorsque le luminaire est à différentes distances.